


Unitary Split Systems

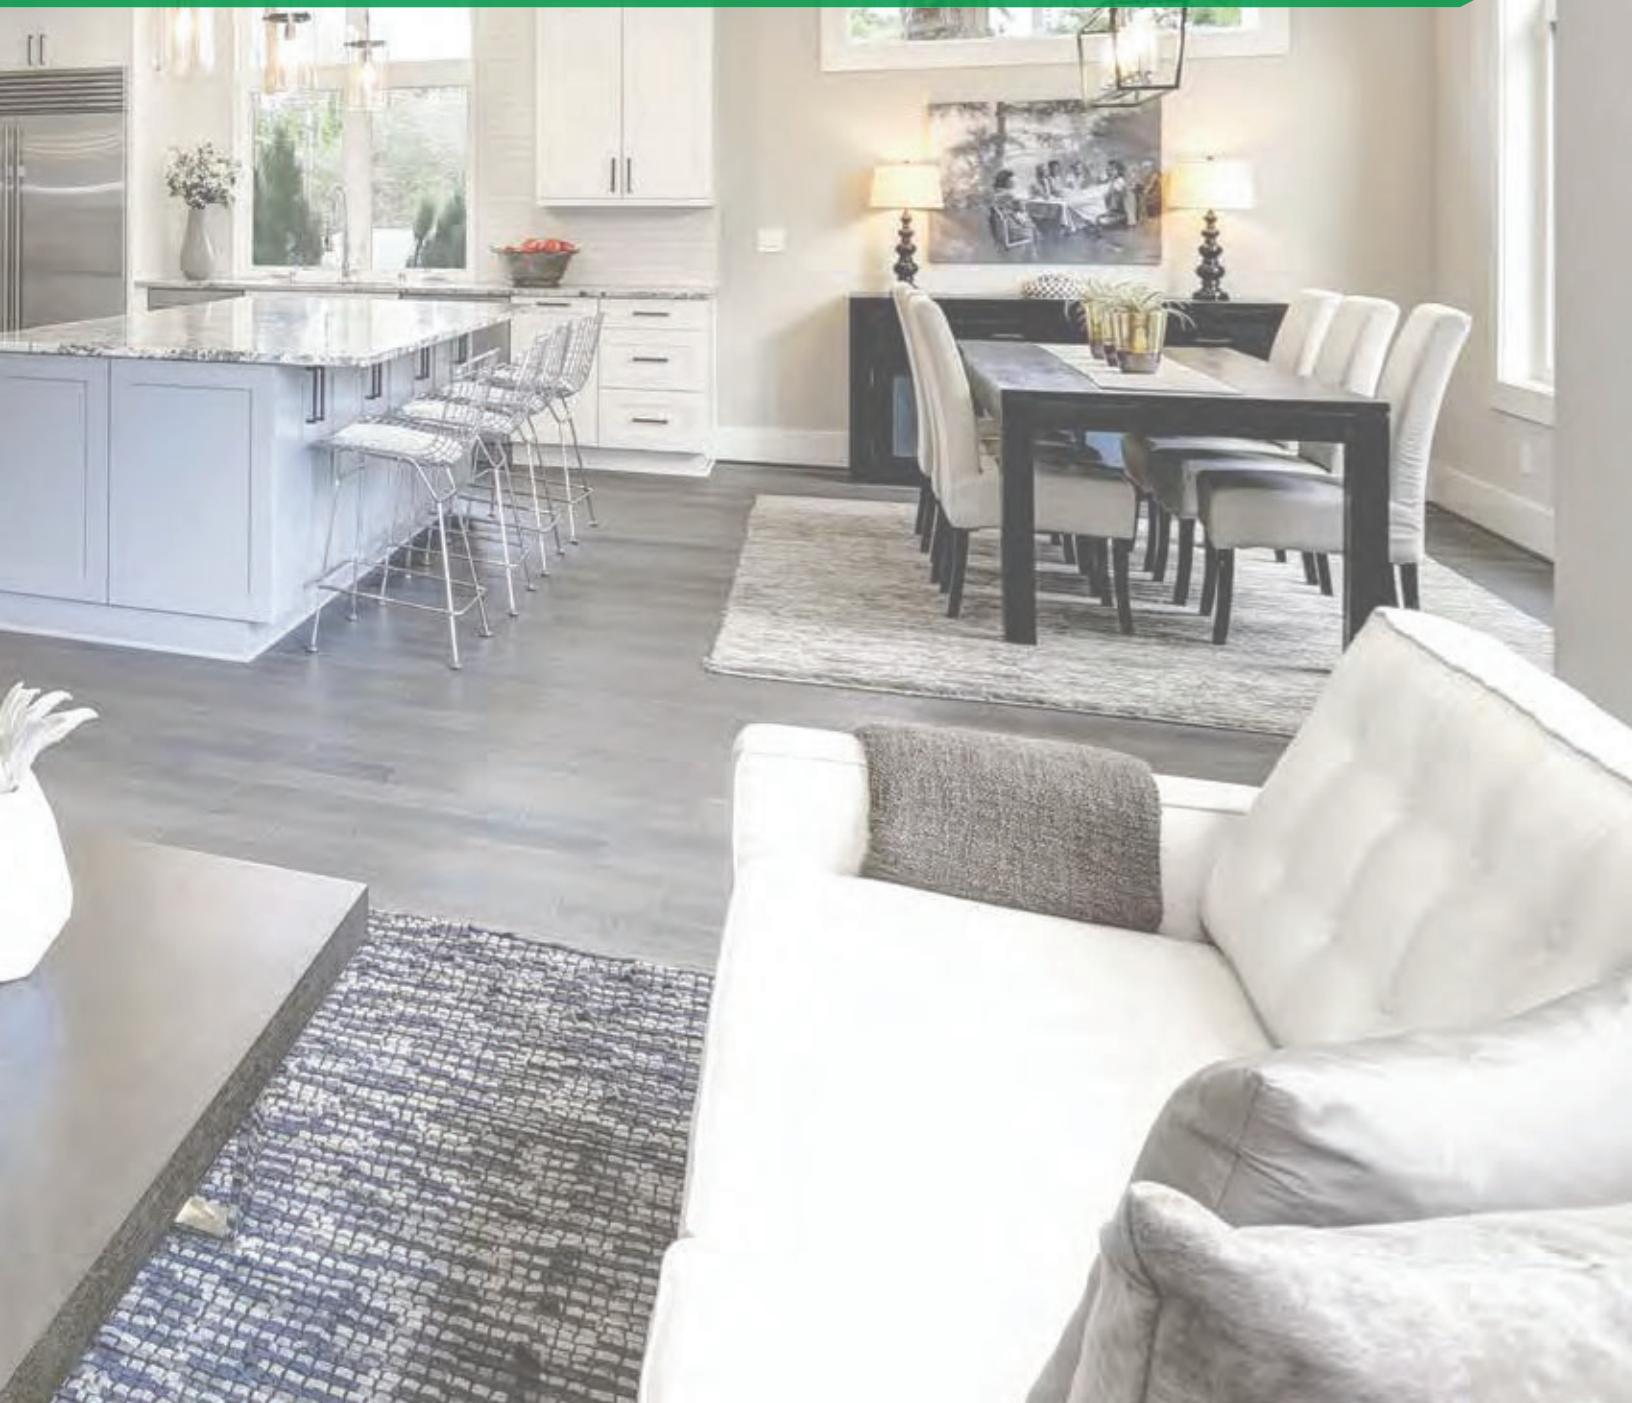

DX9VC

Air Conditioner

Up to 22.5 SEER2



COMFORTABLE LIMITED WARRANTY* PROTECTION

* Complete warranty details available from your local dealer/contractor or at www.daikincomfort.com. To receive the 12-Year Unit Replacement Limited Warranty and 12-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. The duration of warranty coverage in Texas and Florida differs in some cases.

Additional requirements for annual maintenance are required for the Unit Replacement Limited Warranty. Online registration and some of the additional requirements are not required in California or Québec.

Standard Features

- » Daikin variable-speed swing and scroll compressors
- » High-density compressor sound blanket
- » Compatible with the Daikin One+ and Daikin One touch smart thermostats and other Daikin communicating equipment
- » Daikin control algorithmic logic
- » In communicating mode, only two low-voltage wires to outdoor unit required
- » Diagnostic indicator lights, seven-segment LED display, and fault code storage
- » Daikin Inside intelligence for diagnostics
- » Field-selectable boost mode increases compressor speed during unusually high loads
- » Quiet DC outdoor fan motor
- » Field-installed bi-flow filter drier
- » Coil and ambient temperature sensors
- » Suction pressure transducer
- » Sweat connection service valves with easy access to gauge ports
- » AHRI Certified; ETL Listed

When properly matched and installed, your communicating DX9VC Air Conditioner offers up to 22.5 SEER2 high-efficiency performance. The higher the SEER, the greater the efficiency — and the lower the operating cost compared to lower SEER2 units. In many applications, the efficiency of your DX9VC can be enhanced by using it in conjunction with a Daikin brand gas furnace that includes a variable-speed blower motor.



This unit features a powder-paint finish over heavy-gauge galvanized steel that provides premium durability and excellent UV protection.

**20
23
SEER2**

Model	Cooling Capacity (tons)	Voltage-Phase	MCA	MOP	Dimensions			Service Valve		dBs ^{1,2}	Ship Weight (lbs)	ENERGY STAR® Most Efficient 2023 ^{*†}
					W"	D"	H"	Liquid"	Suction"			
DX9VCA2410A*	2	208/230-1	15.2	20	35½	35½	38¼	¾	¾	71	241	YES
DX9VCA3610A*	3	208/230-1	20.6	25	35½	35½	38¼	¾	¾	74	253	NO
DX9VCA4810A*	4	208/230-1	30.1	35	35½	35½	41¾	¾	¾	75	353	YES
DX9VCA6010A*	5	208/230-1	31.1	35	35½	35½	41¾	¾	¾	75	353	YES

¹ Maximum sound levels.

² Rated in accordance with AHRI standard 270.

The manufacturing entity reserves the right to discontinue, or change at any time, specifications or designs without notice or without incurring obligations.



DAIKIN ONE+
SMART THERMOSTAT



DAIKIN ONE TOUCH
SMART THERMOSTAT



Products that are recognized as the Most Efficient of ENERGY STAR® in 2023 prevent greenhouse gas emissions by meeting rigorous energy efficiency performance levels set by the U.S. Environmental Protection Agency.

* Proper sizing and installation of equipment is critical to achieve optimal performance. Split system air conditioners and heat pumps must be matched with appropriate coil components to meet ENERGY STAR criteria. Ask your contractor for details or visit www.energystar.gov.

COMFORTABLE LIMITED WARRANTY* PROTECTION



* Complete warranty details available from your local dealer/contractor or at www.daikincomfort.com. To receive the 12-Year Unit Replacement Limited Warranty and 12-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. The duration of warranty coverage in Texas and Florida differs in some cases..

Additional requirements for annual maintenance are required for the Unit Replacement Limited Warranty. Online registration and some of the additional requirements are not required in California or Québec.

DX7TC

Air Conditioner
Up to 17.2 SEER2

Standard Features

- » Two-Stage Copeland® Ultra-Tech scroll compressor
- » High-density foam compressor sound blanket
- » Compatible with the Daikin One+ and Daikin One touch smart thermostats and other Daikin communicating equipment
- » Copeland® ComfortAlert™ built in diagnostics
- » Copper tube/enhanced aluminum fin coil - 5mm on 2.0-3.0T
- » Diagnostic indicator lights and fault code storage
- » Color-coded terminal strip
- » Quiet ECM outdoor fan motor
- » Fully charged for 15' of tubing length
- » Factory-installed filter drier
- » Ambient temperature sensors
- » High- and low-pressure switches
- » Sweat connection service valves with easy access to gauge ports
- » AHRI Certified; ETL Listed

When properly matched and installed, your DX7TC offers up to 17.2 SEER2 performance. In many applications, the efficiency of your DX7TC can be enhanced by using it in conjunction with a Daikin brand gas furnace that includes a variable-speed blower motor. This unit features a powder-paint finish with premium durability and excellent UV protection. Supports the 2023 DOE Energy Conservation Standards.



**20
23**
SEER2

Model	Nominal Cooling (Tons)	Voltage-Phase	MCA	MOP	Dimensions			Service Valve		dBs ¹	Ship Weight (lbs)	ENERGY STAR® Certified*	ENERGY STAR® Most Efficient 2023 [†]
					W"	D"	H"	Liquid"	Suction"				
DX7TCA2410A*	2	208/230-1	15.3	25	35½	35½	39½	3/8"	3/4"	71	236	YES	YES
DX7TCA3610A*	3	208/230-1	24.1	40	35½	35½	39½	3/8"	3/4"	72	238	YES	YES
DX7TCA4810A*	4	208/230-1	28.3	45	35½	35½	41½	3/8"	3/4"	74	298	YES	YES
DX7TCA6010A*	5	208/230-1	32.4	50	35½	35½	41½	3/8"	3/4"	75	305	YES	NO

* Note: All the Dimensions (W,D, H) are for reference only

The manufacturing entity reserves the right to discontinue, or change at any time, specifications or designs without notice or without incurring obligations.



DAIKIN ONE+
SMART THERMOSTAT



DAIKIN ONE TOUCH
SMART THERMOSTAT



**Most Efficient
2023**
www.energystar.gov

Products that are recognized as the Most Efficient of ENERGY STAR® in 2023 prevent greenhouse gas emissions by meeting rigorous energy efficiency performance levels set by the U.S. Environmental Protection Agency.

*Proper sizing and installation of equipment is critical to achieve optimal performance. Split system air conditioners and heat pumps must be matched with appropriate coil components to meet ENERGY STAR criteria. Ask your contractor for details or visit www.energystar.gov.

DX6VS

Air Conditioner

Up to Up to 17.2 SEER2

COMFORTABLE LIMITED WARRANTY* PROTECTION



* Complete warranty details available from your local dealer/contractor or at www.daikincomfort.com. To receive the 12-Year Unit Replacement Limited Warranty and 12-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. The duration of warranty coverage in Texas and Florida differs in some cases.

Additional requirements for annual maintenance are required for the Unit Replacement Limited Warranty. Online registration and some of the additional requirements are not required in California or Québec.

Standard Features

- » Daikin variable-speed swing compressors
- » Quiet Daikin engineered digitally commutated fan motor
- » Quiet-mode - provides enhanced acoustical comfort, up to 3 different sound levels (as low as 45dBA).
- » High-density foam compressor sound blanket
- » Compatible with the Daikin *One+* and Daikin *One* touch smart thermostats and other Daikin communicating equipment
- » Daikin control algorithmic logic
- » In communicating mode, only two low-voltage wires to outdoor unit required
- » Diagnostic indicator lights, seven-segment LED display, and fault code storage
- » Daikin Inside intelligence for diagnostics
- » Field-selectable boost mode increases compressor speed during unusually high loads
- » Field-installed bi-flow filter drier
- » Coil and ambient temperature sensors
- » Suction pressure transducer
- » Sweat connection service valves with easy access to gauge ports
- » AHRI Certified; ETL Listed

Flexible. Innovative. Technology. The Daikin *Fit* system is a side discharge, smart HVAC system that won't compromise on comfort and connects to ducted solutions traditional to the unitary market. In a market saturated with expensive high-tiered inverters, the system provides a premium mid-efficiency inverter at an affordable rate. The low profile of the outdoor unit offers solutions when a traditional cube style cannot.

**FIT****DAIKIN ONE+**
SMART THERMOSTAT**DAIKIN ONE TOUCH**
SMART THERMOSTAT**20
23**
SEER2**DAIKIN FIT - AC OUTDOOR UNIT**

Model Name	DX6VSS 1810A*	DX6VSS 2410A*	DX6VSS 3010A*	DX6VSS 3610A*	DX6VSS 4210A*	DX6VSS 4810A*	DX6VSS 6010A*	DX6VSA 181WA*	DX6VSA 241WA*	DX6VSA 301WA*	DX6VSA 361WA*
Capacities (AHRI Rated)¹ Max. Cooling (BTU/h)	16,600	22,200	27,800	33,600	39,500	45,000	53,000	16,600	22,200	27,800	32,400
Ambient Operation Range Cooling (°FDB(°CDB))											
Compressor Type RLA	Swing 10.0	Swing 13.4	Swing 16.8	Swing 16.8	Swing 25.5	Swing 25.5	Swing 26.9	Swing 10.0	Swing 13.4	Swing 16.8	Swing 16.8
Condenser Fan Motor Horsepower (HP) FLA	0.09 1.15	0.09 1.15	0.20 2.00	0.20 2.00	0.36 1.63	0.36 1.63	0.36 1.63	0.09 1.15	0.09 1.15	0.20 2.00	0.20 2.00
Refrigeration System Refrigerant Line Size Liquid Line Size ("O.D.) Suction Line Size ("O.D.) Refrigerant Connection Size Liquid Valve Size ("O.D.) Suction Valve Size ("O.D.)	$\frac{3}{8}$ " $\frac{3}{4}$ "	$\frac{3}{8}$ " $\frac{3}{4}$ "	$\frac{3}{8}$ " $\frac{7}{8}$ "	$\frac{3}{8}$ " $\frac{7}{8}$ "	$\frac{3}{8}$ " $1\frac{1}{8}$ "	$\frac{3}{8}$ " $1\frac{1}{8}$ "	$\frac{3}{8}$ " $\frac{3}{4}$ "	$\frac{3}{8}$ " $\frac{3}{4}$ "	$\frac{3}{8}$ " $\frac{3}{4}$ "	$\frac{3}{8}$ " $\frac{3}{4}$ "	$\frac{3}{8}$ " $\frac{3}{4}$ "
Valve Connection Type	Front Sealing	Front Sealing	Front Sealing	Front Sealing	Front and Back Sealing	Front and Back Sealing	Front and Back Sealing	Front Sealing	Front Sealing	Front Sealing	Front Sealing
Refrigerant Charge (oz.) Expansion Device Superheat at Service Valve Subcooling at Service Valve	76 EEV Auto-Control 10±1°F	76 EEV Auto-Control 12±1°F	79 EEV Auto-Control 14±1°F	85 EEV Auto-Control 15±1°F	111 EEV Auto-Control 8±1°F	111 EEV Auto-Control 9±1°F	131 EEV Auto-Control 9±1°F	76 EEV Auto-control 10±1°F	76 EEV Auto-control 12±1°F	79 EEV Auto-control 14±1°F	85 EEV Auto-control 13±1°F
Electrical Data Voltage / Phase (60 Hz) Minimum Circuit Ampacity ² Max. Overcurrent Protection ³ Min / Max Volts Electrical Conduit Size	208-230/1 14.6	208-230/1 18.8	208-230/1 23.9	208-230-1 23.9	208-230-1 34.4	208-230/1 34.4	208-230/1 36.2	208-230/1 14.6	208-230/1 18.8	208-230/1 23.9	208-230/1 23.9
Equipment Weight (lbs) Ship Weight (lbs)	119	119	129	133	163	163	174	119	119	129	133
	133	133	143	148	183	183	196	133	133	143	148

¹ Testing and rated in accordance with ANSI/AHRI Standard 210/240² Wire size should be determined in accordance with National Electrical Codes; extensive wire runs will require larger wire sizes³ Must use time-delay fuses or HACR-type circuit breakers of the same size as noted.**Notes**

Always check the S&R plate for electrical data on the unit being installed. Unit is charged with refrigerant for 15' of $\frac{3}{8}$ " liquid line. System charge must be adjusted per Installation Instructions Final Charge Procedure.

COMFORTABLE LIMITED WARRANTY* PROTECTION



* Complete warranty details available from your local dealer/contractor or at www.daikincomfort.com. To receive the 6-Year Unit Replacement Limited Warranty and 12-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. The duration of warranty coverage in Texas and Florida differs in some cases.

Additional requirements for annual maintenance are required for the Unit Replacement Limited Warranty. Online registration and some of the additional requirements are not required in California or Québec.

DX5SE

Air Conditioner

Up to 17 SEER2

Standard Features

- » High-efficiency Copeland® scroll compressor
- » Advanced Copeland® CoreSense™ Technology
- » Copper tube/enhanced aluminum fin coil -5mm diameter on 1.5-3.0T
- » High-density foam compressor sound blanket
- » Factory-installed filter drier
- » High- and low-pressure switches
- » Service valves with sweat connections and easy access to gauge ports
- » Fully charged for 15' of tubing length
- » AHRI Certified; ETL Listed

When properly matched and installed, your DX5SE offers up to 17 SEER2 performance. In many applications, the efficiency of your DX5SE can be enhanced by using it in conjunction with a Daikin brand gas furnace that includes a variable-speed blower motor. This unit features a powder-paint finish with premium durability and excellent UV protection. Supports the 2023 DOE Energy Conservation Standards.



**20
23**
SEER2

Model	Cooling Capacity (tons)	Voltage-Phase	MCA	MOP	Dimensions			Service Valve		dBs ¹	Ship Weight (lbs)	ENERGY STAR® Certified*
					W"	D"	H"	Liquid"	Suction"			
DX5SEA1810A*	1½	208/230-1	11.9	20	26	26	27	¾	¾	71	144	YES
DX5SEA2410A*	2	208/230-1	15.3	25	29	29	32	¾	¾	72	169	YES
DX5SEA3010A*	2½	208/230-1	17.0	25	35½	35½	39½	¾	¾	71	224	YES
DX5SEA3610A*	3	208/230-1	18.6	30	35½	35½	39½	¾	¾	74	224	YES
DX5SEA4210A*	3½	208/230-1	23.4	40	35½	35½	36½	¾	¾	71	282	YES
DX5SEA4810A*	4	208/230-1	26.2	45	35½	35½	36½	¾	¾	72	282	YES
DX5SEA6010A*	5	208/230-1	32.4	50	35½	35½	41½	¾	¾	75	305	YES

*Note: All the Dimensions (W, D, H) are for reference only

The manufacturing entity reserves the right to discontinue, or change at any time, specifications or designs without notice or without incurring obligations.



DAIKIN ONE+
SMART THERMOSTAT



DAIKIN ONE TOUCH
SMART THERMOSTAT



* Proper sizing and installation of equipment is critical to achieve optimal performance. Split system air conditioners and heat pumps must be matched with appropriate coil components to meet **ENERGY STAR®** criteria. Ask your contractor for details or visit www.energystar.gov.

DX4SE

Air Conditioner

Up to 15.2 SEER2



COMFORTABLE LIMITED WARRANTY* PROTECTION

* Complete warranty details available from your local dealer/contractor or at www.daikincomfort.com. To receive the 6-Year Unit Replacement Limited Warranty and 12-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. The duration of warranty coverage in Texas and Florida differs in some cases.

Additional requirements for annual maintenance are required for the Unit Replacement Limited Warranty. Online registration and some of the additional requirements are not required in California or Québec.

Standard Features

- » High-efficiency Copeland® scroll compressor
- » Advanced Copeland® CoreSense™ Technology
- » Copper tube/enhanced aluminum fin coil -5mm diameter on 1.5-3.0T
- » High-density foam compressor sound blanket
- » Factory-installed filter drier
- » High- and low-pressure switches
- » Service valves with sweat connections and easy access to gauge ports
- » Fully charged for 15' of tubing length
- » AHRI Certified; ETL Listed

When properly matched and installed, your DX4SE offers up to 15.2 SEER2 performance. In many applications, the efficiency of your DX4SE can be enhanced by using it in conjunction with a Daikin brand gas furnace that includes a variable-speed blower motor. This unit features a powder-paint finish with premium durability and excellent UV protection. Supports the 2023 DOE Energy Conservation Standards.



**20
23**
SEER2

Model	Cooling Capacity (tons)	Voltage-Phase	MCA	MOP	Dimensions			Service Valve		dBs	Ship Weight (lbs)
					W"	D"	H"	Liquid"	Suction"		
DX4SEA1810A*	1½	208/230-1	11.9	20	26	26	27	¾"	¾"	71	144
DX4SEA2410A*	2	208/230-1	15.3	25	29	29	32	¾"	¾"	73	169
DX4SEA3010A*	2½	208/230-1	17.0	25	35½	35½	39½	¾"	¾"	72	224
DX4SEA3610A*	3	208/230-1	18.6	30	35½	35½	39½	¾"	¾"	75	224
DX4SEA4210A*	3½	208/230-1	23.4	40	35½	35½	36½	¾"	¾"	72	282
DX4SEA4810A*	4	208/230-1	26.2	45	35½	35½	36½	¾"	¾"	73	282
DX4SEA6010A*	5	208/230-1	32.4	50	35½	35½	41½	¾"	¾"	76	305

The manufacturing entity reserves the right to discontinue, or change at any time, specifications or designs without notice or without incurring obligations.

COMFORTABLE LIMITED
WARRANTY* PROTECTION



* Complete warranty details available from your local dealer/contractor or at www.daikincomfort.com. To receive the 12-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. The duration of warranty coverage in Texas and Florida differs in some cases.

Additional requirements for annual maintenance are required for the Unit Replacement Limited Warranty. Online registration and some of the additional requirements are not required in California or Québec.

DX4SQ

Air Conditioner

Up to 15.2 SEER2

Standard Features

- » Energy-efficient compressor
- » High-density foam compressor sound blanket on 1.5-2.5T
- » Copper tube/ enhanced aluminum fin coil- 5mm diameter on 1.5-4.0T
- » Single-Speed PSC condenser fan motor
- » Factory-installed filter drier
- » Sweat connection service valves with easy access to gauge ports
- » Contactor with lug connection
- » AHRI Certified; ETL Listed

When properly matched and installed, your DX4SQ offers up to 15.2 SEER2 performance. In many applications, the efficiency of your DX4SQ can be enhanced by using it in conjunction with a Daikin brand gas furnace that includes a variable-speed blower motor. This unit features a powder-paint with premium durability and excellent UV protection. Supports the 2023 DOE Energy Conservation Standards.



**20
23
SEER2**

Model	Cooling Capacity (tons)	Voltage-Phase	MCA	MOP	Dimensions			Service Valve		dBs	Ship Weight (lbs)
					W"	D"	H"	Liquid"	Suction"		
DX4SQA1810A*	1½	208/230-1	8.3	15	26	26	27	¾"	¾"	71	136
DX4SQA2410A*	2	208/230-1	11.2	15	26	26	32½	¾"	¾"	72	153
DX4SQA3010A*	2½	208/230-1	15.5	25	29	29	39½	¾"	¾"	72	180
DX4SQA3610A*	3	208/230-1	21.0	35	35½	35½	35¾	¾"	¾"	72	180
DX4SQA4210A*	3½	208/230-1	23.1	40	35½	35½	39½	¾"	¾"	71	207
DX4SQA4810A*	4	208/230-1	26.2	45	35½	35½	39½	¾"	¾"	73	242
DX4SQA6010A*	5	208/230-1	33.3	50	35½	35½	36½	¾"	¾"	75	280

The manufacturing entity reserves the right to discontinue, or change at any time, specifications or designs without notice or without incurring obligations.

DX3SE

Air Conditioner

Up to 14.5 SEER2



COMFORTABLE LIMITED WARRANTY* PROTECTION

* Complete warranty details available from your local dealer/contractor or at www.daikincomfort.com. To receive the 6-Year Unit Replacement Limited Warranty and 12-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. The duration of warranty coverage in Texas and Florida differs in some cases.

Additional requirements for annual maintenance are required for the Unit Replacement Limited Warranty. Online registration and some of the additional requirements are not required in California or Québec.

Standard Features

- » High-efficiency Copeland® scroll compressor
- » Advanced Copeland® CoreSense™ Technology
- » Copper tube/enhanced aluminum fin coil -5mm diameter
- » High-density foam compressor sound blanket
- » Factory-installed filter drier
- » High- and low-pressure switches
- » Service valves with sweat connections and easy access to gauge ports
- » Fully charged for 15' of tubing length
- » AHRI Certified; ETL Listed

When properly matched and installed, your DX3SE Air Conditioner offers up to 14.5 SEER2 energy-efficient performance. The higher the SEER2, the greater the efficiency — and the lower the operating cost compared to lower SEER2 units. In many applications, the efficiency of your DX3SE can be enhanced by using it in conjunction with a Daikin brand gas furnace.



This unit features a powder-paint finish over heavy-gauge galvanized steel that provides premium durability and excellent UV protection.

**20
23
SEER2**

Model	Cooling Capacity (tons)	Voltage-Phase	MCA	MOP	Dimensions			Service Valve		dBs	Ship Weight (lbs)
					W"	D"	H"	Liquid"	Suction"		
DX3SEN1810A*	1½	208/230-1	12.0	20	26	26	27	¾"	¾"	68	135
DX3SEN2410A*	2	208/230-1	15.1	25	26	26	32½	¾"	¾"	68	149
DX3SEN3010A*	2½	208/230-1	17.0	25	29	29	32½	¾"	¾"	72	166
DX3SEN3610A*	3	208/230-1	18.6	30	29	29	32½	¾"	¾"	70	168
DX3SEN4210A*	3½	208/230-1	23.1	40	29	29	39½	¾"	½"	69	203
DX3SEN4810A*	4	208/230-1	24.4	40	35½	35½	35¾	¾"	½"	73	235
DX3SEN6010A*	5	208/230-1	33.3	50	35½	35½	39½	¾"	½"	73	247

Daikin Comfort Technologies Manufacturing, L.P. reserves the right to discontinue or change at any time specifications or designs without notice or without incurring obligations.

** Note: All the Dimensions (W,D, H) are for reference only*

COMFORTABLE LIMITED
WARRANTY* PROTECTION



* Complete warranty details available from your local dealer/contractor or at www.daikincomfort.com. To receive 12-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. Online registration not required in California or Québec. The duration of warranty coverage in Texas and Florida differs in some cases..

DX3SQ

Air Conditioner
Up to 14.5 SEER2

Standard Features

- » Energy-efficient compressor
- » Copper tube/ enhanced aluminum fin coil- 5mm diameter
- » Single-Speed PSC condenser fan motor
- » Factory-installed filter drier
- » Sweat connection service valves with easy access to gauge ports
- » Contactor with lug connection
- » AHRI Certified; ETL Listed

When properly matched and installed, your DX3SQ Air Conditioner offers up to 14.5 SEER2 energy-efficient performance. In many applications, the efficiency of your DX3SQ can be enhanced by using it in conjunction with a Daikin brand gas furnace.



This unit features a powder-paint finish over heavy-gauge galvanized steel that provides premium durability and excellent UV protection.

**20
23
SEER2**

Model	Cooling Capacity (tons)	Voltage- Phase	MCA	MOP	Dimensions			Service Valve		dBs	Ship Weight (lbs)
					W"	D"	H"	Liquid"	Suction"		
DX3SQN1810A*	1½	208/230-1	8.3	15	26	26	27	¾"	¾"	73	130
DX3SQN2410A*	2	208/230-1	11.2	15	26	26	32½	¾"	¾"	73	138
DX3SQN3010A*	2½	208/230-1	16.1	25	29	29	32½	¾"	¾"	76	143
DX3SQN3610A*	3	208/230-1	18.6	30	29	29	32½	¾"	¾"	71	168
DX3SQN4210A*	3½	208/230-1	23.1	40	29	29	39½	¾"	¾"	70	203
DX3SQN4810A*	4	208/230-1	24.4	40	35½	35½	35¾	¾"	¾"	74	235
DX3SQN6010A*	5	208/230-1	33.3	50	35½	35½	39½	¾"	¾"	74	247

Daikin Comfort Technologies Manufacturing, L.P. reserves the right to discontinue or change at any time specifications or designs without notice or without incurring obligations.

** Note: All the Dimensions (W,D, H) are for reference only*

DZ9VC

Heat Pump

Up to 22.5 SEER2 | Up to 8.2 HSPF



COMFORTABLE LIMITED WARRANTY* PROTECTION

* Complete warranty details available from your local dealer/contractor or at www.daikincomfort.com. To receive the 12-Year Unit Replacement Limited Warranty and 12-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. The duration of warranty coverage in Texas and Florida differs in some cases.

Additional requirements for annual maintenance are required for the Unit Replacement Limited Warranty. Online registration and some of the additional requirements are not required in California or Québec.

Standard Features

- » Daikin variable-speed swing compressors
- » High-density compressor sound blanket
- » Compatible with the Daikin *One+* and Daikin *One* touch smart thermostats and other Daikin communicating equipment
- » Daikin control algorithmic logic
- » In communicating mode, only two low-voltage wires to outdoor unit required
- » Diagnostic indicator lights, seven-segment LED display, and fault code storage
- » Daikin Inside intelligence for diagnostics
- » Field-selectable boost mode increases compressor speed during unusually high loads
- » Quiet DC outdoor fan motor
- » Fully charged for 15' of tubing length
- » Field-installed bi-flow filter drier
- » Coil and ambient temperature sensors
- » Suction pressure transducer (in cooling mode)
- » Sweat connection service valves with easy access to gauge ports
- » AHRI Certified; ETL Listed

When properly matched and installed, your communicating DZ9VC Variable-Speed Heat Pump offers up to 22.5 SEER2 high-efficiency performance. The higher the SEER2, the greater the efficiency — and the lower the operating cost compared to lower SEER units. In many applications, the efficiency of your DZ9VC can be enhanced by using it in conjunction with a Daikin brand gas furnace or air handler that includes a variable-speed blower motor.



This unit features a powder-paint finish over heavy-gauge galvanized steel that provides premium durability and excellent UV protection.

**20
23**
SEER2

Model	Nominal Capacities (tons)	Voltage-Phase	MCA	MOP	Dimensions			Service Valve		dBs ^{1,2}	Ship Weight (lbs)	ENERGY STAR® Most Efficient 2023 ³
					W"	D"	H"	Liquid "	Suction "			
DZ9VCA2410A*	2	208-230/1	15.2	20	35½	35½	38¼	¾"	¾"	68	243	YES
DZ9VCA3610A*	3	208-230/1	29.8	30	35½	35½	41¼	¾"	¾"	70	318	YES
DZ9VCA4810A*	4	208-230/1	29.8	30	35½	35½	41¼	¾"	¾"	75	318	YES
DZ9VCA6010A*	5	208-230/1	30.6	35	35½	35½	41¼	¾"	¾"	75	318	NO

¹ Maximum Sound levels² Rated in accordance with AHRI standard 270.

Daikin Manufacturing Company, L.P. reserves the right to discontinue, or change at any time, specifications or designs without notice or without incurring obligations.



DAIKIN ONE+
SMART THERMOSTAT



DAIKIN ONE TOUCH
SMART THERMOSTAT



Most Efficient
2023
ENERGY STAR
www.energystar.gov

Products that are recognized as the Most Efficient of **ENERGY STAR®** in 2023 prevent greenhouse gas emissions by meeting rigorous energy efficiency performance levels set by the U.S. Environmental Protection Agency.

* Proper sizing and installation of equipment is critical to achieve optimal performance. Split system air conditioners and heat pumps must be matched with appropriate coil components to meet **ENERGY STAR** criteria. Ask your contractor for details or visit www.energystar.gov.

COMFORTABLE LIMITED WARRANTY* PROTECTION



* Complete warranty details available from your local dealer/contractor or at www.daikincomfort.com. To receive the 12-Year Unit Replacement Limited Warranty and 12-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. The duration of warranty coverage in Texas and Florida differs in some cases..

Additional requirements for annual maintenance are required for the Unit Replacement Limited Warranty. Online registration and some of the additional requirements are not required in California or Québec.

Standard Features

- » Two-Stage Copeland® UltraTech scroll compressor
- » High-density foam compressor sound blanket
- » Compatible with the Daikin One+ and Daikin One touch smart thermostats and other Daikin communicating equipment
- » ComfortAlert™ built in diagnostics
- » Copper tube/enhanced aluminum fin coil - 5mm on 2.0-3.0T
- » Efficient, two-speed ECM condenser fan motor
- » Simple low-voltage wiring to outdoor unit in communicating mode
- » Diagnostic indicator lights and storage of six fault codes
- » Color-coded terminal strip for non-communicating set-up
- » High- and low-pressure switches
- » Time-delay technology with short-cycle protection to ensure quiet, reliable defrost
- » Factory-installed bi-flow liquid-line filter drier
- » Factory-installed suction-line accumulator
- » Factory-installed compressor crankcase heater
- » Factory-installed high-capacity muffler
- » Factory-installed coil and ambient temperature sensors
- » AHRI Certified; ETL Listed

DZ7TC

Heat Pump

Up to 17.2 SEER2 | 8.2 HSPF2



When properly matched and installed, your communicating DZ7TC Variable-Speed Heat Pump offers up to 17.2 SEER2 high-efficiency performance. The higher the SEER, the greater the efficiency — and the lower the operating cost compared to lower SEER units. In many applications, the efficiency of your DZ7TC can be enhanced by using it in conjunction with a Daikin brand air handler that includes a variable-speed blower motor.

This unit features a powder-paint finish over heavy-gauge galvanized steel that provides premium durability and excellent UV protection.

2023
SEER2

UNITARY PRODUCTS

Model	Nominal Capacities (tons)		Voltage-Phase	MCA	MOP	Dimensions			Service Valve		dBs ¹	Ship Weight (lbs)	ENERGY STAR® 2023
	Cooling ¹	Heating ¹				W "	D "	H "	Liquid "	Suction "			
DZ7TCA2410A*	2	2	208/230-1	16.4	25	35½	35½	39½	¾"	¾"	71	239	Most Efficient [†]
DZ7TCA3610A*	3	3	208/230-1	24.1	40	35½	35½	35¾	¾"	¾"	75	277	Most Efficient [†]
DZ7TCA4810A*	4	4	208/230-1	27.7	45	35½	35½	41½	¾"	1½"	77	327	Most Efficient [†]
DZ7TCA6010A*	5	5	208/230-1	32.4	50	35½	35½	41½	¾"	1½"	78	335	ENERGY STAR ¹

¹ Maximum Sound levels

Daikin Manufacturing Company, L.P. reserves the right to discontinue, or change at any time, specifications or designs without notice or without incurring obligations.



DAIKIN ONE+
SMART THERMOSTAT



DAIKIN ONE TOUCH
SMART THERMOSTAT



Products that are recognized as the Most Efficient of ENERGY STAR® in 2023 prevent greenhouse gas emissions by meeting rigorous energy efficiency performance levels set by the U.S. Environmental Protection Agency.

*Proper sizing and installation of equipment is critical to achieve optimal performance. Split system air conditioners and heat pumps must be matched with appropriate coil components to meet ENERGY STAR criteria. Ask your contractor for details or visit www.energystar.gov.



Proper sizing and installation of equipment is critical to achieving optimal performance. Split system air conditioners and heat pumps must be matched with appropriate coil components to meet ENERGY STAR® criteria. Ask your contractor for details or visit www.energystar.gov. The www.energystar.gov website provides up-to-date system combinations certified to meet ENERGY STAR® requirements.

DZ6VS

Heat Pump

Up to 17.5 SEER2 & 8.6 HSPF2

COMFORTABLE LIMITED WARRANTY* PROTECTION



* Complete warranty details available from your local dealer/contractor or at www.daikincomfort.com. To receive the 12-Year Unit Replacement Limited Warranty and 12-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. The duration of warranty coverage in Texas and Florida differs in some cases.

Additional requirements for annual maintenance are required for the Unit Replacement Limited Warranty. Online registration and some of the additional requirements are not required in California or Québec.

Standard Features

- » Daikin variable-speed swing compressors
- » Quiet Daikin engineered digitally commutated fan motor
- » High-density foam compressor sound blanket
- » Compatible with the Daikin *One+* and Daikin *One* touch smart thermostats and other Daikin communicating equipment Daikin control algorithmic logic
- » Intelligent Defrost Mode
- » In communicating mode, only two low-voltage wires to outdoor unit required
- » Diagnostic indicator lights, seven-segment LED display, and fault code storage
- » Daikin Inside intelligence for diagnostics
- » Field-selectable boost mode increases compressor speed during unusually high loads
- » Field-installed bi-flow filter drier
- » Coil and ambient temperature sensors
- » Suction pressure transducer
- » Muffler on 1.5-3.0-ton models
- » Quiet-mode - provides enhanced acoustical comfort, up to 3 different sound levels (as low as 45dBA).
- » Sweat connection service valves with easy access to gauge ports

Flexible. Innovative. Technology. The Daikin *Fit* system is a side discharge, smart HVAC system that won't compromise on comfort and connects to ducted solutions traditional to the unitary market. In a market saturated with expensive high-tiered inverters, the system provides a premium mid-efficiency inverter at an affordable rate. The low profile of the outdoor unit offers solutions when a traditional cube style cannot.

**FIT****DAIKIN ONE+**
SMART THERMOSTAT**DAIKIN ONE TOUCH**
SMART THERMOSTAT**20
23**
SEER2

- » Advanced water-shedding drain pan
- » Hot start technology
- » AHRI Certified; ETL Listed

DAIKIN FIT - HEAT PUMP OUTDOOR UNIT

Model Name	DZ6VSA 1810A*	DZ6VSA 2410A*	DZ6VSA 3010A*	DZ6VSA 3610A*	DZ6VSA 4210A"	DZ6VSA 4810A*	DZ6VSA 6010A*
Capacities (AHRI Rated)¹							
Max. Cooling (BTU/h)	16,600	22,200	27,800	33,600	39,500	45,000	53,000
Max. Heating (BTU/h)	17,400	23,200	28,800	34,600	40,000	45,500	54,500
Ambient Operation Range				0 to 115 (-17.8 to 46.1)			
Cooling (°F DB/°C DB))				-10 to 70 (-23.3 to 21.1)			
Heating (°F DB/°C DB))							
Compressor							
Type	Swing Compressor	Swing Compressor	Swing Compressor	Swing Compressor	Swing Compressor	Swing Compressor	Swing Compressor
RLA	10.0	13.4	16.8	16.8	25.5	25.5	26.9
Condenser Fan Motor							
Horsepower (HP)	0.09	0.09	0.20	0.20	0.36	0.36	0.36
FLA	1.15	1.15	2.00	2.00	1.63	1.63	1.63
Refrigeration System							
Refrigerant Line Size							
Liquid Line Size ("O.D.)	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"
Suction Line Size ("O.D.)	3/4"	3/4"	7/8"	7/8"	1 1/8"	1 1/8"	1 1/8"
Refrigerant Connection Size							
Liquid Valve Size ("O.D.)	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"
Suction Valve Size ("O.D.)	3/4"	3/4"	7/8"	7/8"	7/8"	7/8"	7/8"
Valve Connection Type	Front Sealing	Front Sealing	Front Sealing	Front Sealing	Front and Back Sealing	Front and Back Sealing	Front and Back Sealing
Refrigerant Charge (oz.)	81	81	88	88	118	118	127
Expansion Device	EEV	EEV	EEV	EEV	EEV	EEV	EEV
Superheat at Service Valve	Auto-control	Auto-control	Auto-control	Auto-control	Auto-control	Auto-control	Auto-control
Subcooling at Service Valve	10±1°F	12±1°F	14±1°F	15±1°F	8±1°F	9±1°F	9±1°F
Electrical Data							
Voltage / Phase (60 Hz)	208-230/1	208-230/1	208-230/1	208-230/1	208-230/1	208-230/1	208-230/1
Minimum Circuit Ampacity ²	14.6	18.8	23.9	23.9	34.4	34.4	36.2
Max. Overcurrent Protection ³	15	20	25	25	35	35	40
Min / Max Volts	197/253	197/253	197/253	197/253	197/253	197/253	197/253
Electrical Conduit Size	1/2"	1/2"	1/2"	1/2"	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"
Equipment Weight (lbs)	122	122	132	137	168	168	179
Ship Weight (lbs)	137	137	147	151	185	185	198

¹ Tested and rated in accordance with AHRI Standard 210/240.² Wire size should be determined in accordance with National Electrical Codes; extensive wire runs will require larger wire sizes.³ Must use time-delay fuses or HACR-type circuit breakers of the same size as noted.**Notes:**

Always check the S&R plate for electrical data on the unit being installed.

/ System charge must be adjusted per Installation Instructions Final Charge Procedure.

COMFORTABLE LIMITED
WARRANTY* PROTECTION



* Complete warranty details available from your local dealer/contractor or at www.daikincomfort.com. To receive the 12-Year Unit Replacement Limited Warranty and 12-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. The duration of warranty coverage in Texas and Florida differs in some cases.

Additional requirements for annual maintenance are required for the Unit Replacement Limited Warranty. Online registration and some of the additional requirements are not required in California or Québec.

DZ6VS

Heat Pump

Up to 17.5 SEER2 & 8.6 HSPF2 (cont.)

DAIKIN F/T - HEAT PUMP OUTDOOR UNIT ENHANCED CAPACITY COLD CLIMATE

Model Name	DZ6VSA 241EA*	DZ6VSA 361EA*	DZ6VSA 421EA*	DZ6VSA 481EA**
Capacities (AHRI Rated)¹				
Max. Cooling (BTU/h)	23,000	34,200	40,000	44,000
Max. Heating (BTU/h)	23,000	34,200	40,000	44,000
Ambient Operation Range				
Cooling (°F DB/°C DB))		0 to 115 (-17.8 to 46.1)		
Heating (°F DB/°C DB))		-10 to 70 (-23.3 to 21.1)		
Compressor				
Type	Swing	Swing	Swing	Swing
RLA	16.8	25.5	26.9	26.9
Condenser Fan Motor				
Horsepower (HP)	0.20	0.36	0.36	0.36
FLA	2.00	1.63	1.63	1.63
Refrigeration System				
Refrigerant Line Size				
Liquid Line Size ("O.D.)	3/8"	3/8"	3/8"	3/8"
Suction Line Size ("O.D.)	7/8"	1 1/8"	1 1/8"	1 1/8"
Refrigerant Connection Size				
Liquid Valve Size ("O.D.)	3/8"	3/8"	3/8"	3/8"
Suction Valve Size ("O.D.)	7/8"	7/8"	7/8"	7/8"
Valve Connection Type	Front Sealing	Front and Back Sealing	Front and Back Sealing	Front and Back Sealing
Refrigerant Charge (oz.)	88	118	127	127
Expansion Device	EEV	EEV	EEV	EEV
Superheat at Service Valve	Auto-control	Auto-control	Auto-control	Auto-control
Subcooling at Service Valve	14±1°F	8±1°F	9±1°F	9±1°F
Electrical Data				
Voltage / Phase (60 Hz)	208-230/1	208-230/1	208-230/1	208-230/1
Minimum Circuit Ampacity ²	23.9	34.4	36.2	36.2
Max. Overcurrent Protection ³	25	35	40	40
Min / Max Volts	197/253	197/253	197/253	197/253
Electrical Conduit Size	1/2"	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"
Equipment Weight (lbs)				
132	168	179	179	179
Ship Weight (lbs)				
147	185	198	198	198
ENERGY STAR® Cold Climate				

¹ Tested and rated in accordance with ANSI/AHRI Standard 210/240

² Wire size should be determined in accordance with National Electrical Codes; extensive wire runs will require larger wire sizes

³ Must use time-delay fuses or HACR-type circuit breakers of the same size as noted.

Notes

» Always check the S&R plate for electrical data on the unit being installed.

» Installer will need to supply 7/8" to 1 1/8" adapters for suction line connections.

» Unit is charged with refrigerant for 15' of 3/8" liquid line. System charge must be adjusted per Installation Instructions Final Charge Procedure.

» (See table below for allowable line set diameter)



DAIKIN ONE+
SMART THERMOSTAT



DAIKIN ONE TOUCH
SMART THERMOSTAT



Select DZ6VS heat pump models meet the **ENERGY STAR®** cold climate requirements. Please refer to product engineering manuals for additional information or visit www.energystar.go.

DZ5SE

Heat Pump

Up to 16 SEER2 | 8 HSPF2

COMFORTABLE LIMITED WARRANTY* PROTECTION



* Complete warranty details available from your local dealer/contractor or at www.daikincomfort.com. To receive the 6-Year Unit Replacement Limited Warranty and 12-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. The duration of warranty coverage in Texas and Florida differs in some cases.

Additional requirements for annual maintenance are required for the Unit Replacement Limited Warranty. Online registration and some of the additional requirements are not required in California or Québec.

Standard Features

- » High-efficiency Copeland® scroll compressor
- » Advanced Copeland® CoreSense™ technology
- » Copper tube/enhanced aluminum fin coil - 5mm diameter on 1.5-3.5T
- » High density foam compressor sound blanket
- » Time-delay technology to ensure quiet reliable defrost
- » Factory-installed bi-flow liquid line filter drier
- » Factory-installed suction line accumulator
- » Factory-installed compressor crank case heater
- » Factory-installed high capacity muffler
- » High- and low-pressure switches
- » Service valves with sweat connections and easy access to gauge ports
- » Copper tube/enhanced aluminum fin coil
- » Fully charged for 15' of tubing length
- » AHRI Certified; ETL Listed

When properly matched and installed, your DZ5SE offers up to 16 SEER2 performance. In many applications, the efficiency of your DZ5SE can be enhanced by using it in conjunction with a Daikin brand gas furnace or air handler that includes a variable-speed blower motor. This unit features a powder-paint finish with premium durability and excellent UV protection. Supports the 2023 DOE Energy Conservation Standards.



**20
23**
SEER2

Model	Nominal Cooling (Tons)	Voltage Phase	MCA	MOP	Dimensions			Service Valve		dBs	Ship Weight (lbs)	ENERGY STAR® Certified*
					W"	D"	H"	Liquid	Suction			
DZ5SEA1810A*	1½	208/230-1	12.2	20	26	26	27	¾"	¾"	68	186	YES
DZ5SEA2410A*	2	208/230-1	15.3	25	29	29	32	¾"	¾"	72	213	YES
DZ5SEA3010A*	2½	208/230-1	18.6	30	35½	35½	39½	¾"	¾"	69	235	YES
DZ5SEA3610A*	3	208/230-1	22.8	35	35½	35½	39½	¾"	¾"	72	242	YES
DZ5SEA4210A*	3½	208/230-1	23.4	40	35½	35½	36½	¾"	¾"	75	284	YES
DZ5SEA4810A*	4	208/230-1	26	45	35½	35½	36½	¾"	¾"	73	292	YES
DZ5SEA6010A*	5	208/230-1	33.0	50	35½	35½	41½	¾"	¾"	75	329	YES

The manufacturing entity reserves the right to discontinue, or change at any time, specifications or designs without notice or without incurring obligations.

*Note: All the Dimensions (W, D, H) are for reference only



DAIKIN ONE+
SMART THERMOSTAT



DAIKIN ONE TOUCH
SMART THERMOSTAT



* Proper sizing and installation of equipment is critical to achieve optimal performance. Split system air conditioners and heat pumps must be matched with appropriate coil components to meet **ENERGY STAR®** criteria. Ask your contractor for details or visit www.energystar.gov.

COMFORTABLE LIMITED WARRANTY* PROTECTION



* Complete warranty details available from your local dealer/contractor or at www.daikincomfort.com. To receive the 6-Year Unit Replacement Limited Warranty and 12-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. The duration of warranty coverage in Texas and Florida differs in some cases.

Additional requirements for annual maintenance are required for the Unit Replacement Limited Warranty. Online registration and some of the additional requirements are not required in California or Québec.

DZ4SE

Heat Pump

15.2 SEER2 | 7.8 HSPF2

Standard Features

- » High-efficiency Copeland® scroll compressor
- » Advanced Copeland® CoreSense™ technology
- » Copper tube/enhanced aluminum fin coil - 5mm diameter on 1.5-3.5T
- » High density foam compressor sound blanket
- » Time-delay technology to ensure quiet reliable defrost
- » Factory-installed bi-flow liquid line filter drier
- » Factory-installed suction line accumulator
- » Factory-installed compressor crank case heater
- » Factory-installed high capacity muffler
- » High- and low-pressure switches
- » Service valves with sweat connections and easy access to gauge ports
- » Fully charged for 15' of tubing length
- » AHRI Certified; ETL Listed

When properly matched and installed, your DZ4SE Heat Pump offers up to 15.2 SEER2 high-efficiency performance. The higher the SEER, the greater the efficiency — and the lower the operating cost compared to lower SEER2 units. In many applications, the efficiency of your DZ4SE can be enhanced by using it in conjunction with a Daikin brand gas furnace or air handler.



This unit features a powder-paint finish over heavy-gauge galvanized steel that provides premium durability and excellent UV protection.

**20
23**
SEER2

Model	Nominal Capacities (tons)		Voltage-Phase	MCA	MOP	Dimensions			Service Valve		dBs	Ship Weight (lbs)
	Cooling ¹	Heating ¹				W"	D"	H"	Liquid"	Suction"		
DZ4SEA1810A*	1½	1½	208/230-1	12.2	20	29	29	35 ¹¹ / ₁₆	¾"	¾"	68	179
DZ4SEA2410A*	2	2	208/230-1	15.3	25	29	29	35 ¹¹ / ₁₆	¾"	¾"	72	179
DZ4SEA3010A*	2½	2½	208/230-1	18.6	30	29	29	39 ⁸ / ₁₆	¾"	¾"	75	190
DZ4SEA3610A*	3	3	208/230-1	21	35	35½	35½	39 ¹⁰ / ₁₆	¾"	¾"	72	234
DZ4SEA4210A*	3½	3½	208/230-1	23.4	40	35½	35½	35 ¹³ / ₁₆	¾"	¾"	75	284
DZ4SEA4810A*	4	4	208/230-1	26.2	45	35½	35½	36 ⁷ / ₁₆	¾"	¾"	74	292
DZ4SEA6010A*	5	5	208/230-1	33.3	50	35½	35½	41 ¹⁰ / ₁₆	¾"	¾"	75	325

¹Tons of Refrigeration

The manufacturing entity reserves the right to discontinue, or change at any time, specifications or designs without notice or without incurring obligations.

DZ4SQ

Heat Pump

15.2 SEER2 | 7.8 HSPF2



COMFORTABLE LIMITED WARRANTY* PROTECTION

* Complete warranty details available from your local dealer/contractor or at www.daikincomfort.com. To receive 2-Year Unit Replacement Limited Warranty and the 12-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. Online registration not required in California or Québec. The duration of warranty coverages in Texas and Florida differs in some cases.

Standard Features

- » Energy-efficient compressor
- » Refrigeration-grade premium copper tubing and aluminum fin condenser coil
- » Time-delay defrost technology
- » Factory-installed in-line filter drier
- » Factory-installed heater band and accumulator
- » Quiet condenser fan motor
- » Heavy-gauge galvanized steel cabinet with sound-control top
- » Baked enamel finish protects the system from the elements
- » AHRI certified; ETL listed

When properly matched and installed, your DZ4SQ Heat Pump offers up to 14.3 SEER2 high-efficiency performance. The higher the SEER2, the greater the efficiency — and the lower the operating cost compared to lower SEER2 units. In many applications, the efficiency of your DZ4SQ can be enhanced by using it in conjunction with a Daikin brand gas furnace or air handler.



This unit features a powder-paint finish over heavy-gauge galvanized steel that provides premium durability and excellent UV protection.

**20
23**
SEER2

Model	Nominal Capacities		Voltage-Phase	MCA	MOP	Dimensions			Service Valve		dBs	Ship Weight (lbs)
	Cooling ¹	Heating ¹				W "	D "	H "	Liquid "	Suction "		
DZ4SQA1810A*	1½	1½	208/230-1	8.6	15	29	29	35 ¹¹ / ₁₆	3/8"	3/4"	70	176
DZ4SQA2410A*	2	2	208/230-1	11.5	15	29	29	35 ¹¹ / ₁₆	3/8"	3/4"	74	175
DZ4SQA3010A*	2½	2½	208/230-1	18.6	30	29	29	39 ⁹ / ₁₆	3/8"	3/4"	75	190
DZ4SQA3610A*	3	3	208/230-1	21	35	35½	35½	39 ⁹ / ₁₆	3/8"	7/8"	72	234
DZ4SQA4210A*	3½	3½	208/230-1	23.4	40	35½	35½	35 ¹¹ / ₁₆	3/8"	7/8"	75	284
DZ4SQA4810A*	4	4	208/230-1	26.2	45	35½	35½	36 ⁷ / ₁₆	3/8"	7/8"	74	292
DZ4SQA6010A*	5	5	208/230-1	33.3	50	35½	35½	41 ¹⁰ / ₁₆	3/8"	7/8"	75	325

¹Tons of Refrigeration

The manufacturing entity reserves the right to discontinue, or change at any time, specifications or designs without notice or without incurring obligations.